


1132S

Scrim Reinforced Transfer Tape

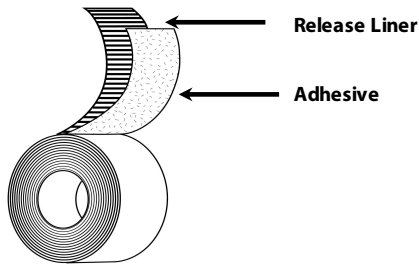

Liner:	55# Gold Glassine Liner
Adhesive:	Rubber (I917)
Backing/Carrier:	Scrim

Applications

- Laminating and bonding applications on high and low surface energy materials, rough or porous materials such as non-wovens, felts, foams, etc.
- Ideal for low volatile compound (VOC) applications

Features

- Rubber Adhesive
- Scrim Reinforcement
- 55# Glassine Liner

Benefits

- High peel and good shear properties
- Bonds to a wide range of substrates
- Good wet out on rough and porous surfaces
- Provides strength and dimensional stability
- Conformable and good dimensional stability

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Thickness (Adhesive & Scrim)	3.5 mils	0.089 mm	PSTC 133
Liner Thickness	3.0 mils	0.076 mm	PSTC 133
Adhesion to Steel (15 min dwell)	90 oz/in	9.85 N/cm	PSTC 101 Mod
Adhesion to Steel (72 hr dwell)	95 oz/in	10.39 N/cm	PSTC 101 Mod
Shear Strength	>7 Days		PSTC 107
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	20 to 160 °F	-6 to 71 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment.

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.