


1087H

Double-Coated, Double-Linered Tape

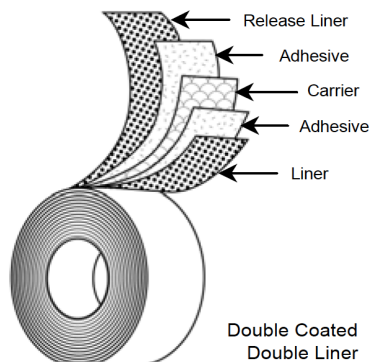

Liner 1:	92lb Tan Polycoated Kraft, silicone coated on one side
Side 1 Adhesive:	Acrylic (I600)
Carrier:	0.5 mil polyester film
Side 2 Adhesive:	Acrylic (I600)
Liner 2:	2 mil Natural HDPE Film

Applications

- Graphic applications
- Laminating paper, felt, sponge rubber, foam, and plastic
- General purpose mounting and assembly
- Splicing

Features

- Polyester Film Carrier
- Acrylic Adhesive
- Dual Liner

Benefits

- Support for aid in processing and application
- Conformable
- High tack, high shear adhesive
- Bonds well to a variety of substrates
- Good UV resistance
- Good plasticizer migration resistance
- Excellent for die-cut applications

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness (w/o liners)	3.1 mils	0.079 mm	PSTC 133
Adhesive Thickness (Side 1)	1.3 mils	0.033 mm	PSTC 133
Adhesive Thickness (Side 2)	1.3 mils	0.033 mm	PSTC 133
Carrier Thickness	0.5 mils	0.013 mm	PSTC 133
Adhesion to Steel (Air Side)	60 oz/in	6.56 N/cm	PSTC 101
Adhesion to Steel (Liner Side)	60 oz/in	6.56 N/cm	PSTC 101
Shear Strength (Air Side)	100+ hours		PSTC 107
Shear Strength (Liner Side)	100+ hours		PSTC 107
Application Temperature	50 to 150 °F	10 to 65 °C	
Laminating Temperature	50 to 150 °F	10 to 65 °C	
Maximum Continuous Use	200 °F	93 °C	
Intermittent Use	250 °F	121 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.