


# 1142S-55

## Scrim Reinforced Transfer Tape

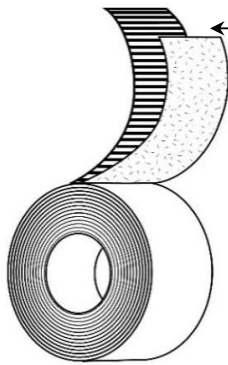

**Release Liner** Liner: 55# Gold Glassine Liner

**Adhesive** Liner Side Adhesive: Acrylic (I645)

**Backing/Carrier:** Scrim

**Specifications:** Tested to various automotive OEM specifications

### Applications

- Laminating and bonding applications on high and low surface energy materials, rough or porous materials such as non-wovens, felts, foams, etc.
- Ideal for low volatile compound (VOC) uses
- Automotive interior mounting.

### Features

### Benefits

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• Acrylic Adhesive</li> <li>• Scrim Reinforcement</li> <li>• 55# Glassine Liner</li> </ul> | <ul style="list-style-type: none"> <li>• High peel strength</li> <li>• Excellent high or low temperature performance</li> <li>• Bonds to a wide range of substrates</li> <li>• Good wet out on rough and porous surfaces</li> <li>• Provides strength and dimensional stability</li> <li>• Conformable to flat and curved surfaces</li> <li>• Conformable and good dimensional stability</li> <li>• Smooth, easy release</li> </ul> |
|---|---|

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Thickness (Adhesive &amp; Scrim)</b>	3.5 mils	0.089 mm	PSTC 133
<b>Liner Thickness</b>	3.0 mils	0.076 mm	PSTC 133
<b>Adhesion to Steel (15 min dwell)</b>	86 oz/in	9.41 N/cm	PSTC 101 Mod (2mil AL Foil Backing)
<b>Adhesion to Steel (72 hr dwell)</b>	106 oz/in	11.60 N/cm	PSTC 101 Mod (2mil AL Foil Backing)
<b>Shear Strength (1" x 1" x 1Kg)</b>	<24 Hours		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	-4 to 300 °F	-20 to 149 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F  
Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.