


# 3199V

## Single-Coated Tape with Liner

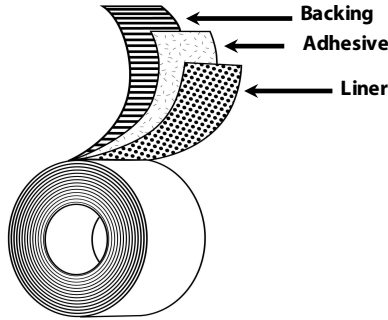

<b>Backing:</b>	1.0 mil White Polyester Film
<b>Adhesive:</b>	Heat Seal Rubber (1905)
<b>Liner:</b>	60lb semi-bleached kraft, silicone release treated on both sides

### Applications

- Labelling applications
- Ideal for heat seal labels for books and periodicals

### Features

- Polyester Film Backing
- Heat Seal Rubber Adhesive
- 60lb Liner

### Benefits

- Conformable and printable
- Resists tearing and abrasion
- Excellent aging characteristics and shelf life after proper heat seal bonding
- Easy to process and die-cut

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness w/liner</b>	6.5 mils	0.165 mm	PSTC 133
<b>Adhesive Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Carrier Thickness</b>	1.0 mils	0.025 mm	PSTC 133
<b>Liner Thickness</b>	3.5 mils	0.089 mm	PSTC 133
<b>Adhesion to Steel</b>	60 oz/in	6.56 N/cm	PSTC 101 Mod
<b>Application Temperature</b>	40 to 150 °F	4 to 65 °C	
<b>Laminating Temperature</b>	200 to 260 °F	93 to 127 °C	
<b>Maximum Continuous Use</b>	160 °F	71 °C	
<b>Intermittent Use</b>	180 °F	82 °C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.