


# 3209A

## Single-Coated Tape

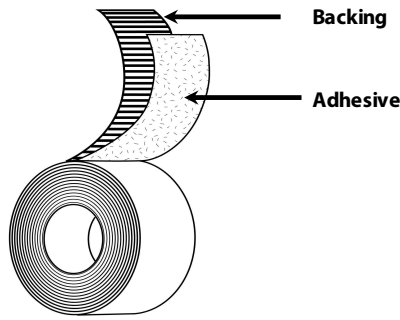

**Backing:** 2.0 mil Oriented Polypropylene Film, Silicone treated on one side

**Adhesive:** Acrylic (I609)

### Applications

- Protective overlay
- Sealing and protection of surfaces

### Features

- Polypropylene Backing
- Acrylic Adhesive

### Benefits

- Resists tearing and abrasion
- Excellent durability
- Repositionable for easy installation
- Easy removal with no residue from most surfaces

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness</b>	2.7 mils	0.069 mm	PSTC 133
<b>Adhesive Thickness</b>	0.7 mils	0.018 mm	PSTC 133
<b>Carrier Thickness</b>	2.0 mils	0.051 mm	PSTC 133
<b>Adhesion to Steel</b>	22 oz/in	2.41 N/cm	PSTC 101 Mod
<b>Shear Strength</b>	168+ hours		PSTC 107
<b>Application Temperature</b>	50 to 150 °F	10 to 65 °C	
<b>Maximum Continuous Use</b>	100 °F	38 °C	
<b>Intermittent Use</b>	200 °F	93 °C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. (20 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.