


Double-Coated Foam Tape

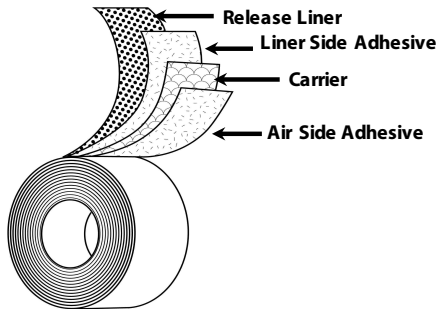

Liner: 74# Polycoated Kraft

Liner Side Adhesive: Rubber (1920)

Backing/Carrier: 4lb Density White Closed-Cell Cross-Linked PE Foam

Air Side Adhesive: Rubber (1920)

Applications

- Mounting signs, wire clips, moldings, reflectors, molded and extruded plastics, hardware, etc.

Features

- Rubber Adhesive
- PE Foam Carrier
- 74# Polycoated Kraft Liner

Benefits

- Moderate tack
- Excellent shear strength
- Bonds well to certain LSE substrates
- Facilitates gap filling for bonding to irregular surfaces
- Closed cell foam resists water/oil absorption
- Conformable and good dimensional stability

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Overall Thickness (w/liner)	134.5 mils	3.416 mm	PSTC 133
Air-Side Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Carrier Thickness	125.0 mils	3.175 mm	PSTC 133
Liner Side Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Liner Thickness	5.5 mils	0.140 mm	PSTC 133
Adhesion to Steel (Cohesive)	160 oz/in	17.50 N/cm	PSTC 101 Mod - 1 mil PET
Shear Strength	>14 Days	no creep	PSTC 107 Mod
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	30 to 150 °F	-1 to 66 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.