


# 2253B

## Transfer Adhesive

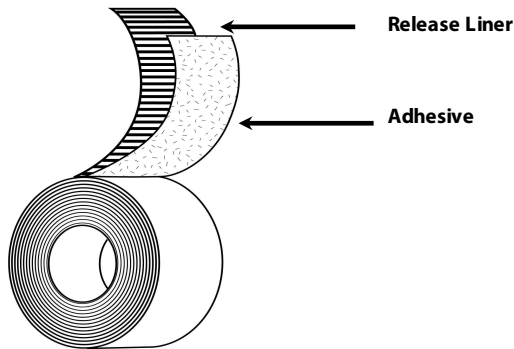

**Adhesive:** Acrylic (I605)

**Liner:** 80lb super-calendered, silicone release treated on both sides

### Applications

- Laminating paper, felt, sponge rubber, foam, and plastic
- Gasket assembly
- Mounting decorative trim and sound and vibration damping materials
- Weather stripping

### Features

- Acrylic Adhesive
- 80lb Release Liner

### Benefits

- High heat and humidity resistance
- Excellent performance over a wide temperature range
- Adheres well to foams and plastics including PE, TPO, ABS, and PP
- Non-fogging for automotive applications
- Easy to die-cut and convert

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness w/liner</b>	7.3 mils	0.185 mm	PSTC 133
<b>Adhesive Thickness</b>	2.8 mils	0.071 mm	PSTC 133
<b>Liner Thickness</b>	4.5 mils	0.114 mm	PSTC 133
<b>Adhesion to Steel</b>	60 oz/in	6.56 N/cm	PSTC 101 Mod
<b>Shear Strength</b>	168+ hours		PSTC 107
<b>Laminating Temperature</b>	50 to 150 °F	10 to 65 °C	
<b>Maximum Continuous Use</b>	200 °F	93 °C	
<b>Intermittent Use</b>	250 °F	121 °C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.