


2914B

Single-Coated Tape with Liner

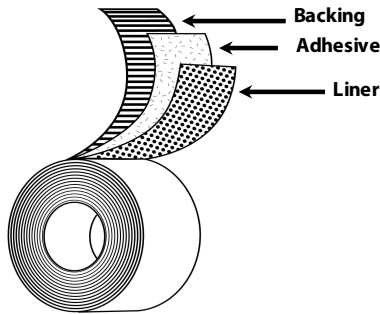

Backing:	2.0 mil polyester film
Adhesive:	Acrylic (I613)
Liner:	60lb semi-bleached kraft, silicone release treated on both sides

Applications

- Reinforcing applications
- Sealing and protection
- Device component and assembly
- Excellent anchorage to ether or ester foams, EPDM sponge, and plastics (including PE, TPO, ABS, and PP)

Features

- Polyester Film Backing
- Acrylic Adhesive
- 60lb Liner

Benefits

- Provides dimensional stability and stiffness
- Resists tearing and abrasion
- Excellent adhesion to a broad range of surfaces
- Resists humidity and plasticizer migration
- Easy to process and die-cut

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/liner	6.7 mils	0.170 mm	PSTC 133
Adhesive Thickness	1.2 mils	0.030 mm	PSTC 133
Carrier Thickness	2.0 mils	0.051 mm	PSTC 133
Liner Thickness	3.5 mils	0.089 mm	PSTC 133
Adhesion to Steel	85 oz/in	9.30 N/cm	PSTC 101 Mod
Shear Strength	100+ hours		PSTC 107
Laminating Temperature	50 to 150 °F	10 to 65 °C	
Maximum Continuous Use	200 °F	93 °C	
Intermittent Use	250 °F	121 °C	

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.