


601H

Transfer Adhesive

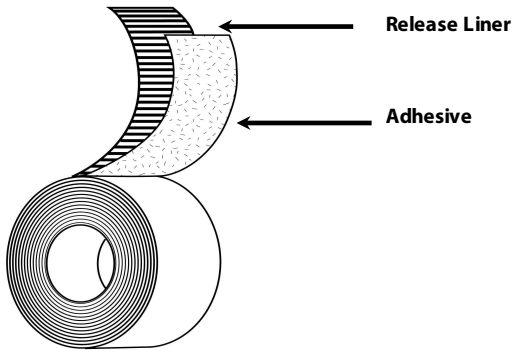

Adhesive: Acrylic (I600)

Liner: 80lb super-calendered, silicone release treated on both sides

Applications

- Mounting name plates, decals, and decorative trim pieces
- Laminating paper, felt, sponge rubber, and plastic

Features

- Acrylic Adhesive
- 80lb SC Kraft Release Liner

Benefits

- High tack adhesive
- Excellent anchorage to a variety of substrates
- UV resistant
- Excellent aging characteristics
- Easy liner removal

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/liner	6.8 mils	0.173 mm	PSTC 133
Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Liner Thickness	4.8 mils	0.122 mm	PSTC 133
Adhesion to Steel	50 oz/in	5.47 N/cm	PSTC 101 Mod
Shear Strength	168+ hours		PSTC 107
Application Temperature	32 to 180 °F	0 to 82 °C	
Laminating Temperature	60 to 250 °F	16 to 121 °C	
Maximum Continuous Use	200 °F	93 °C	
Intermittent Use	250 °F	121 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.