


## AdMount™ Digital Mounting Tape

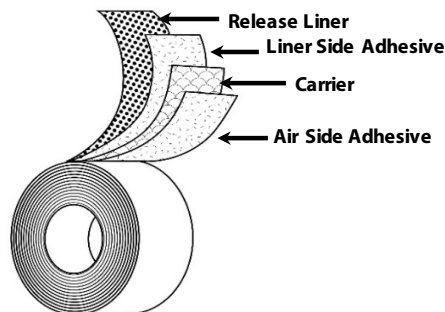

- Liner:** 74# Polycoated Kraft
- Liner Side Adhesive:** Rubber (I912)
- Backing/Carrier:** 1.4 mil White, Opaque, PP Film
- Air Side Adhesive:** Rubber (I912)

### Applications

- Digital imaging and graphic arts uses
- Permanent mounting to most common paper and board stocks
- Print brightening and mounting uses to FOAM-X®, Fome-Cor®, GATORFOAM®, GATORBOARD®, and Sintra®

### Features

- Rubber Adhesive
- PP Film Carrier
- 74# Polycoated Kraft Liner

### Benefits

- High tack and high peel adhesion
- Permanent bonding
- Bonds to a variety of substrates
- Thick and opaque to brighten prints
- Conformable
- Good lay-flat; moisture resistant

### Typical Test Values

|                                       | Standard UOM | Metric UOM  | Test Method              |
|---------------------------------------|--------------|-------------|--------------------------|
| <b>Overall Thickness (w/liner)</b>    | 9.3 mils     | 0.236 mm    | PSTC 133                 |
| <b>Air-Side Adhesive Thickness</b>    | 1.2 mils     | 0.030 mm    | PSTC 133                 |
| <b>Carrier Thickness</b>              | 1.4 mils     | 0.036 mm    | PSTC 133                 |
| <b>Liner Side Adhesive Thickness</b>  | 1.2 mils     | 0.030 mm    | PSTC 133                 |
| <b>Liner Thickness</b>                | 5.5 mils     | 0.140 mm    | PSTC 133                 |
| <b>Adhesion to Steel (Air Side)</b>   | 80 oz/in     | 8.75 N/cm   | PSTC 101 Mod - 1 mil PET |
| <b>Adhesion to Steel (Liner Side)</b> | 80 oz/in     | 8.75 N/cm   | PSTC 101 Mod - 1 mil PET |
| <b>Shear Strength</b>                 | >7 Days      |             | PSTC 107 Mod             |
| <b>Laminating Temperature</b>         | 68 to 100 °F | 20 to 38 °C |                          |
| <b>Service Temperature</b>            | 30 to 150 °F | -1 to 66 °C |                          |

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.