


# POLYKEN® 3614A

## Non-Woven Single-Coated Tape

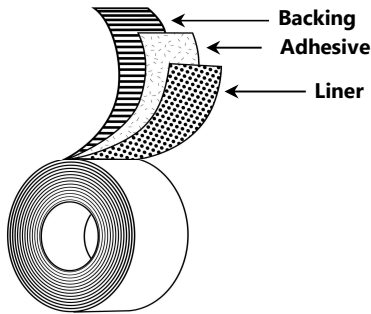

<b>Backing:</b>	1.3 oz/sy white spunlace polyester non-woven
<b>Adhesive:</b>	Non-sensitizing medical-grade acrylic (M110)
<b>Liner:</b>	72lb white polycoated kraft, silicone treated on one side

### Applications

- Electrodes: ECG, EKG, TENS
- Wound coverings
- Medical device attachment
- Island dressings

### Features

- PET non-woven carrier
- Medical-grade Acrylic Adhesive
- 72lb Release Liner

### Benefits

- Breathable for maximum patient comfort
- Highly conformable
- Designed for short-term wear applications
- Highly resistant to perspiration-borne moisture
- Easy to die-cut and convert
- Good dimensional stability and lay flat

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Total Thickness w/o Liner</b>	8.0 mils	0.203 mm	PSTC 133
<b>Adhesive Thickness</b>	1.4 mils	0.036 mm	PSTC 133
<b>Liner Thickness</b>	5.6 mils	0.142 mm	PSTC 133
<b>Adhesion to Steel</b>	20 oz/in	2.19 N/cm	PSTC 101 Mod

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic, non-irritating, and non-sensitizing.

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.

