


HFW-295

Double-Coated Foam Glazing Tape

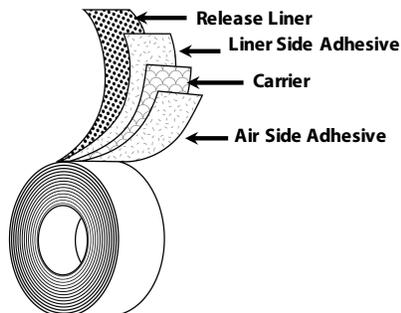

Liner:	4 mil Blue PP
Liner Side Adhesive:	Acrylic (I625)
Backing/Carrier:	1/16" Crosslinked Closed Cell White PE Foam
Air Side Adhesive:	Rubber (I913)
Specifications:	AAMA 810.1-16 for expanded cellular glazing tape

Note: Same product is also available on **Black** color foam as **HFB-295**

Applications

- Seal window glass onto wood, aluminum, or plastic frames
- Seals against air, moisture, light, and dust
- Provides cushioning to absorb vibration and shock
- Thermal insulating and sound deadening

Features

- Liner Side Acrylic Adhesive
- Foam Carrier
- Air Side Rubber Adhesive
- PE Film Liner

Benefits

- Good UV resistance for glass-side application
- Moderate shear strength
- Excellent bond to surfaces
- Conformable
- Minimal moisture absorption
- Aggressive adhesion to surfaces
- Lends itself to die-cutting and kiss cuts

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Overall Thickness (w/liner)	70.5 mils	1.791 mm	PSTC 133
Air-Side Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Carrier Thickness	62.5 mils	1.588 mm	PSTC 133
Liner Side Adhesive Thickness	2.0 mils	0.051 mm	PSTC 133
Liner Thickness	4.0 mils	0.102 mm	PSTC 133
Adhesion to Steel (Air Side)	80 oz/in	8.75 N/cm	PSTC 101 Mod - 1 mil PET
Shear Strength	>7 Days		PSTC 107 Mod
Laminating Temperature	68 to 100 °F	20 to 38 °C	
Service Temperature	-30 to 160 °F	-34 to 71 °C	

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.